



# CAMERAS AND VIDEO DETECTOR

## Indoor protection

## Outdoor protection



Description and reference	MotionViewer camera <b>ISMV200</b>	MotionViewer camera <b>IMV200</b> and <b>IMVA200</b>	MotionViewer camera <b>OSMV210</b> and <b>OSMV210</b>	MotionViewer camera <b>OMVC200</b> and <b>OSMVC200</b>	Visual verification detector <b>OMV-VX200</b>
Application	<ul style="list-style-type: none"> <li>• Colour and Video Live</li> <li>• 4 years battery life</li> <li>• 3 lithium batteries</li> <li>• Protection rating: IP30 / IK04</li> </ul>	<ul style="list-style-type: none"> <li>• Colour video</li> <li>• Wide angle</li> <li>• 4 years battery life</li> <li>• 2 lithium batteries</li> </ul>	<ul style="list-style-type: none"> <li>• Colour video</li> <li>• IP54 weatherproof</li> <li>• Tamper with an accelerometer captor</li> <li>• 90° detection lens</li> <li>• 3 spare lenses</li> <li>• Masking kit</li> <li>• Embedded I/O board</li> <li>• 4 years battery life</li> <li>• 4 lithium batteries</li> <li>• Video Live (only <b>OSMV</b>)</li> </ul>	<ul style="list-style-type: none"> <li>• Colour video</li> <li>• IP54 weatherproof</li> <li>• Tamper with an accelerometer captor</li> <li>• Vertical curtain lens</li> <li>• 4 years battery life</li> <li>• 4 lithium batteries</li> <li>• Video Live (only <b>OSMVC</b>)</li> </ul>	<ul style="list-style-type: none"> <li>• Colour video</li> <li>• IP65 weatherproof</li> <li>• Tamper</li> <li>• Double infrared detection</li> <li>• 4 years battery life</li> <li>• 3 lithium batteries</li> </ul>
Temp Rating	-10°/+55°C	-10°/+40°C	-25°/+70°C	-25°/+70°C	-20°/+60°C



# DETECTION

## PIR detection

## Contacts

## Smoke



Description and reference	Indoor Motion Detector <b>IMD200</b> <b>IMDA200</b> and <b>IMDC200</b>	Indoor Door Contact <b>IDC200</b> and <b>IDC210</b>	Indoor Door Contact <b>ICT200</b>	Smoke detector <b>ISD200</b>
Application	<ul style="list-style-type: none"> <li>• 90° wide angle (IMD/IMDA) or vertical curtain (IMDC)</li> <li>• 4 years battery life</li> <li>• 1 lithium battery</li> </ul>	<ul style="list-style-type: none"> <li>• Exists in brown color IDC210</li> <li>• 4 years battery life</li> <li>• 1 lithium battery</li> </ul>	<ul style="list-style-type: none"> <li>• Hardware input</li> <li>• 4 years battery life</li> <li>• 1 lithium battery</li> </ul>	<ul style="list-style-type: none"> <li>• 1 year battery life</li> <li>• 1 lithium battery</li> </ul>



# ARMING

## Keypad

## Badge reader

## Keyfob

## Proximity tag



Description and reference	Keypads <b>XMA210</b> and <b>XMB210</b>	Outdoor badge reader <b>BR250</b>	Keyfob <b>KF240</b>	Proximity tag <b>VT100</b>
Application	<ul style="list-style-type: none"> <li>• Keypads with display backlighting</li> <li>• Badge reader (only XMB)</li> <li>• Panic button : 3 options</li> <li>• Tamper detection</li> <li>• 4 lithium batteries</li> </ul>	<ul style="list-style-type: none"> <li>• Outdoor badge reader</li> <li>• IP65</li> <li>• Tamper detection</li> <li>• 3 lithium batteries</li> <li>• Protection rating : IP65/IK07</li> </ul>	<ul style="list-style-type: none"> <li>• Compact, easy to use</li> <li>• Arm specific areas as determined</li> <li>• Siren and silent panic alarms</li> <li>• 10 years battery life</li> <li>• Interchangeable battery</li> <li>• Exists in 1 panic button <b>KF210</b></li> </ul>	<ul style="list-style-type: none"> <li>• Compatible with XL panel, XMB keypad and BR badge reader.</li> </ul>



# SIRENS


## Indoor siren

## Outdoor siren



Description and reference	Indoor sirens <b>SE200</b> and <b>SEV200</b>	Outdoor sirens <b>OSX200</b> and <b>OSX210</b>
Application	<ul style="list-style-type: none"> <li>• Sound level: 107 dBA @ 1 m (SE), 100 dBA @ 1m (SEV)</li> <li>• Operating Temperature : -10°/+40°C</li> </ul>	<ul style="list-style-type: none"> <li>• Level 105 dBA @ 1 meter</li> <li>• Operating Temperature : -25°/+70° C</li> <li>• Protection rating : IP44D/IK07</li> </ul>

WIRELESS ALARM SYSTEMS  
ALL RANGE

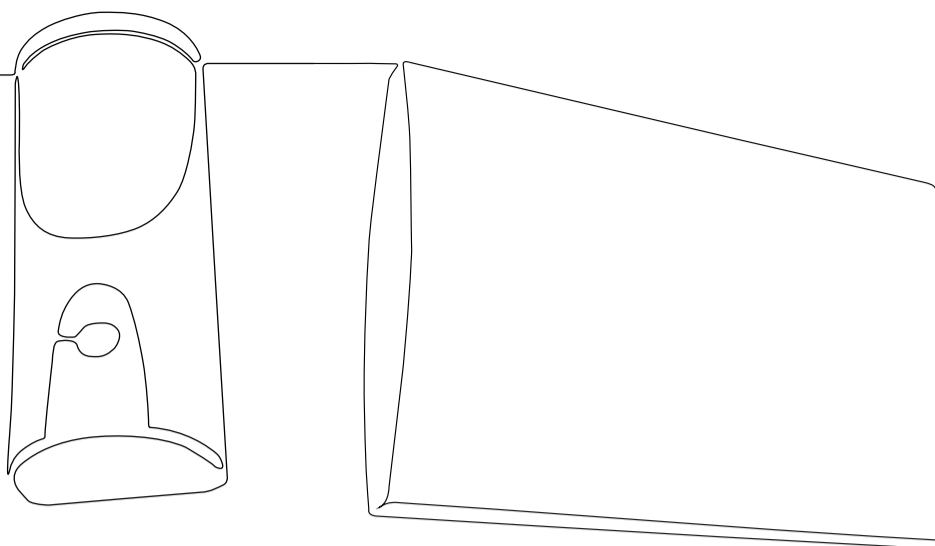

 PANELS

Residential and Pro


**W** Range

**X** Range

Outdoor  
**EXT** Range



Description and reference	Panel W(x)10 WIP(x)20 WIP(x)10	Panel XL200GPRS	Panel XT-IP210	Panel XV-IP210	Panel XT0-IP210
Keypad		✓			
Badge Reader		✓			
2 way-voice		✓		✓	
Wi-Fi	✓				
Siren	✓	✓			
GPRS Communication	✓	✓	✓	✓	✓
IP Transmission	✓		✓	✓	✓
External antennas GPRS & Radio			✓	✓	✓
Number of codes/tags	50	20	20	20	20
Number of devices	25	19	25	25	25
Hardware inputs	1		3	2	3
Hardware outputs	2		2	1	2
Temp Range	-10°/+40°C	-10°/+40°C	-10°/+40°C	-10°/+40°C	-25°/+70°C
Installation					Mounting Bracket included
Protection rating					IP65/IK06
Power supply	Mains power (WPS100) with battery back-up (included)	2 options : - 8 alkaline - 4 alkaline and power kit 7,2VDC	2 options: - back-up power supply with 4 alkaline batteries LR20 (mandatory for IP transmission) - stand-alone system powered by four lithium batteries LSH20 (only if GPRS mode)	Back-up power supply with 4 alkaline batteries LR20	2 options: - back-up power supply with 4 alkaline batteries LR20 (mandatory for IP transmission) - stand-alone system powered by four lithium batteries LSH20 (only if GPRS mode)

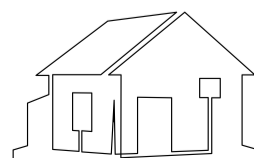

**VIDEOFIED**  
ULTIMATE SECURITY

**SALES OFFICE**

23, avenue du Général Leclerc  
92340 BOURG-LA-REINE / FRANCE  
E-Mail: emeasales@rsivideotech.com

[www.videofied.com](http://www.videofied.com)